




SV

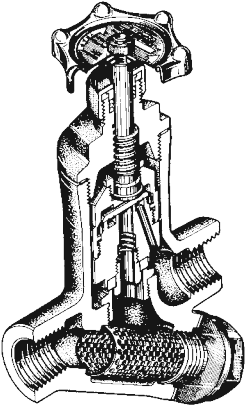

SL3




SL3




SL3-X




Capacity Chart SV-N

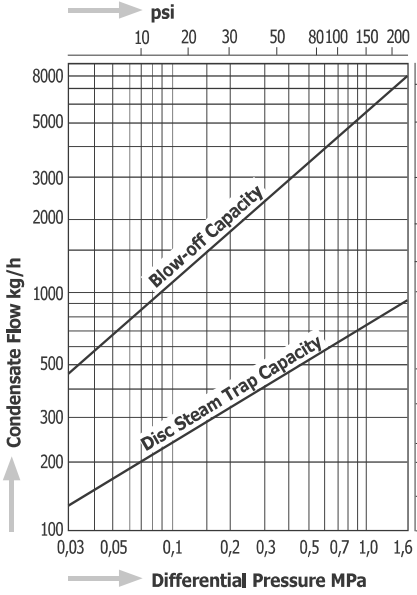

Capacity Chart SV1

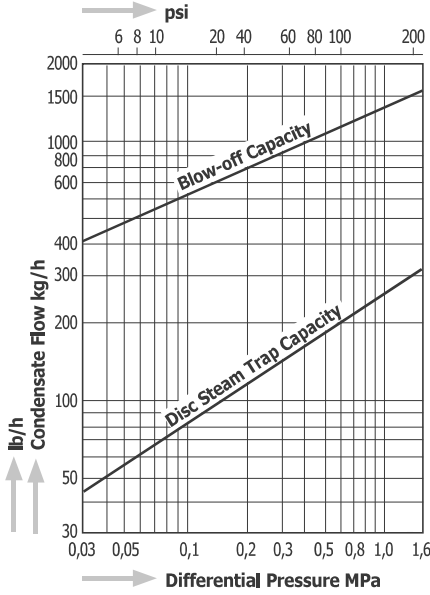

Capacity Chart SL3

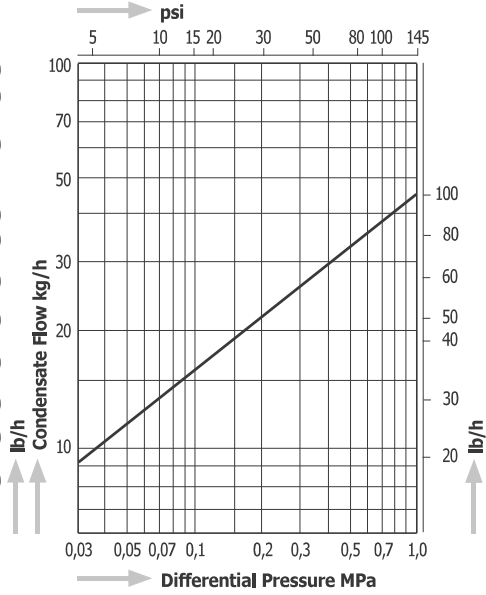

Dimensions


SV1

SV - 4NF, 6NF, 8NF

SV - 4N, 6N, 8N

SL3

SL3-X

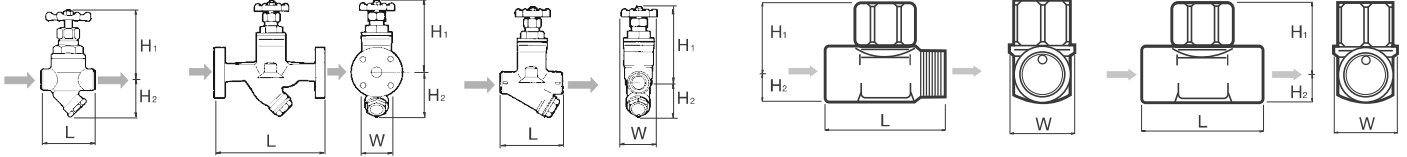

Model	Connections	Size	Operating Pressure Range		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight																			
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb																		
SV1	Screwed Rc, NPT	3/8", 1/2"	0,03 - 1,6	4,4 - 230	220	428	75	105	53	65	3,0	4,1	2,1	2,6	Forged Steel A105	1,0	2,2																		
		107						4,2				1,2				2,6																			
SV -	Screwed Rc, NPT	1/2"					0,03 - 1,6	4,4 - 230	220	428	110	60	65	65		4,3	2,4	2,6	2,6	Cast Iron FC250	2,4	5,3													
		155										65					70				4,7	2,8	2,5	5,5											
		SV -									Flanged JIS, ASME, DIN	3/4"	0,03 - 1,6	4,4 - 230		220	428	120	70		90	65	8,7	2,8	2,6	Cast Iron FC250	2,7	5,9							
												1							9,1					3,5			2,6	4,1	9,0						
												SV -						Flanged JIS, ASME, DIN	1/2"		0,03 - 1,6	4,4 - 230	220	428	220		150	90	65	8,7	2,6	2,6	Cast Iron FC250	4,7	10,3
																			3/4"								9,1				3,5			2,6	5,2
SV -	Flanged JIS, ASME, DIN	1"					0,03 - 1,6	4,4 - 230	220	428	230	150	90	65		8,7	2,6	2,6	Cast Iron FC250	5,2	11,5														
		1"										9,1					3,5			2,6	5,2	11,5													
SL3	Screwed Inlet : Rc, NPT Outlet: G	1/4"	0,03 - 1,0	4,4 - 145	400	752	40	22	8	19	1,6	0,9	0,3	0,7	Stainless Steel SUS416	0,06	0,13																		
SL3-X	Screwed Rc, NPT	1/4"	0,03 - 1,0	4,4 - 145	400	752	40	22	8	19	1,6	0,9	0,3	0,7		0,06	0,13																		