

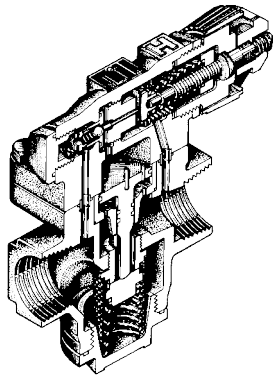


RE3

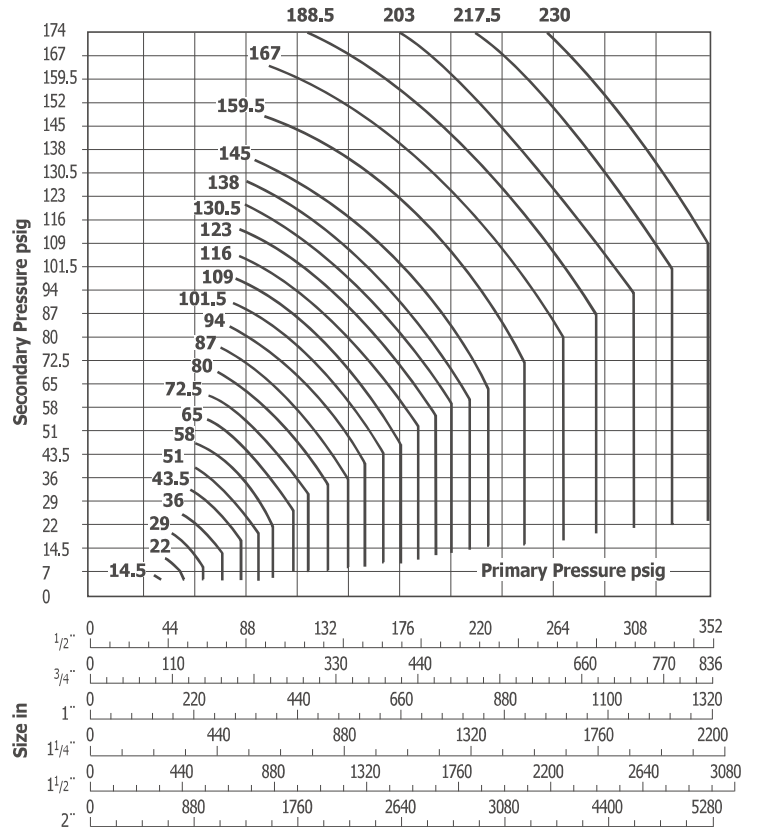



Body Material: Brass C3771

Capacity Charts RE3

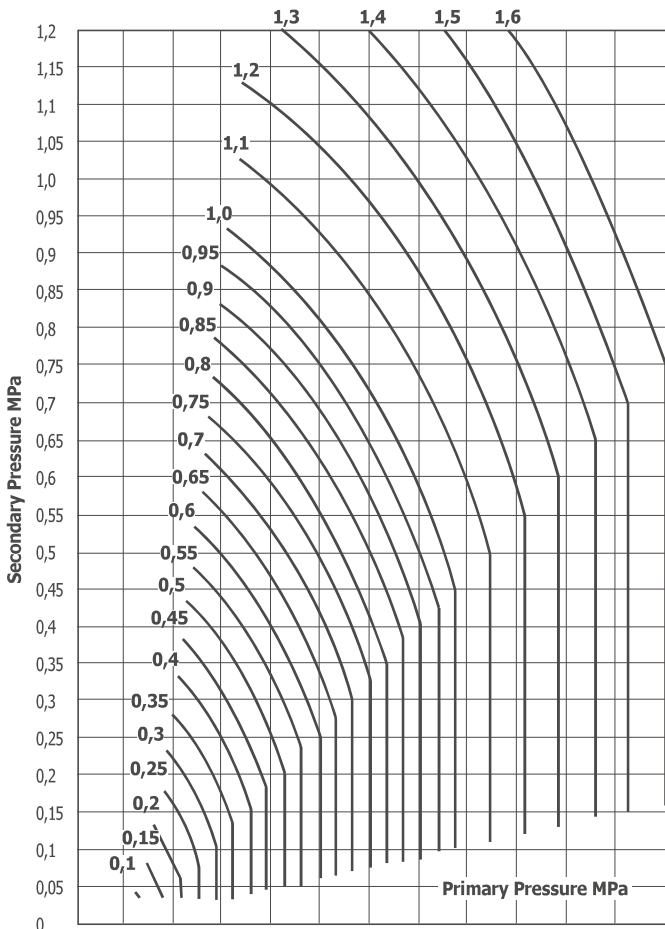

→ Steam Flow lb/h

Dimensions RE3

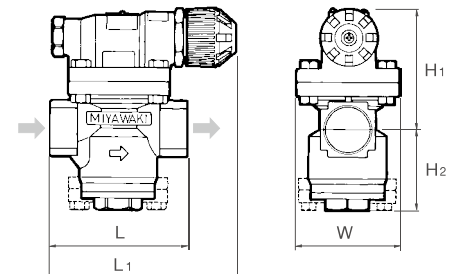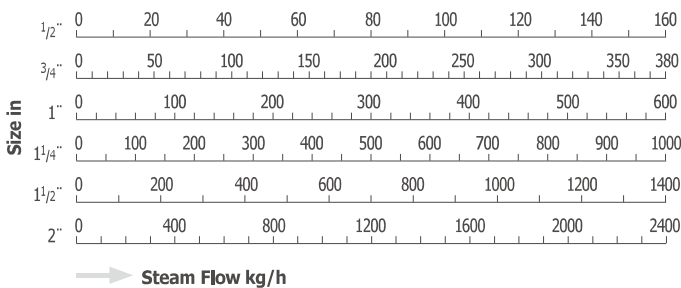

| Model | Connection | Size (in) | Operating Pressure (Primary) | | Secondary Pressure | | Max. Red. Pressure Ratio | Max. Oper. Temperature | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Weight | | Values | |
|-------|-----------------|-----------|------------------------------|------------|--------------------|-----------|--------------------------|------------------------|-----|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|--------|------|--------|-----|
| | | | MPa | psig | MPa | psig | | °C | °F | L | L1 | H1 | H2 | W | L | L1 | H1 | H2 | W | kg | lb | Cv | Kvs |
| RE3 | Screwed Rc, NPT | 1/2" | 0,1 - 1,6 | 14,5 - 230 | 0,03 - 1,2 | 4,4 - 174 | 20 : 1 | 220 | 428 | 90 | 127 | 87 | 58 | 74 | 3,5 | 5,0 | 3,4 | 2,3 | 2,9 | 2,8 | 6,2 | 0,8 | 0,7 |
| | | 95 | | | | | | | | 130 | 3,7 | | | | 5,1 | 2,9 | | | | 1,9 | 1,6 | | |
| | | 100 | | | | | | | | 132 | 3,9 | 5,2 | 3,0 | 2,6 | | | | | | | | | |
| | | 130 | | | | | | | | 155 | 111 | 73 | 96 | 5,1 | 6,1 | 4,4 | 2,9 | 3,8 | 6,2 | 13,6 | 4,9 | 4,2 | |
| | | 140 | | | | | | | | 157 | 121 | 79 | 110 | 5,5 | 6,2 | 4,8 | 3,1 | 4,3 | 8,2 | 18,0 | 12,0 | 10,3 | |